



A RUTHMAN COMPANY

Vortex Series Vertical Pumps

VORTEX
V6X8-15SE

1750 RPM

Gusher Vortex Series Vertical pumps provide years of trouble-free, low maintenance operation in applications with high levels of solids or entrained air.

Vortex pumps handle solids and fibrous materials without clogging. Their design moves liquids and oils containing up to 30% entrained air with no adverse effects on suction performance. Low flows are not a problem for Vortex pumps, as the design allows throttling to a low performance range unacceptable to many centrifugal pumps.

Key Specifications

Type: Vortex Centrifugal End Suction

Flow: Up to 2,400 gpm

Head: Up to 200' TDH

Liquid Temp: Max 180° F

Max Solid Size: 6"

Power Frame: 54 VHD

Motor Type: TEFC, TC Frame

Intake: 8"

Discharge: 6"

Power: 60 hp, 75 hp, 100 hp, 125 hp, 150 hp and 200 hp



Features

- Recessed impeller handles solids and fibrous material without clogging
- Durable CD4MCu impeller standard to prevent premature wear
- Choice of materials for process chemical compatibility
- Renewable shaft sleeves and bushings protect shaft from wear
- VFD compatible motors to suit application needs
- Power frame and spare wear parts interchangeable with Gusher 7550 Series pumps to streamline replacement part inventory

Options

- Iron, 316 Stainless Steel, CD4MCu construction
- Carbon or Tungsten Carbide bushings
- Extended lengths
- Flush line addition
- Top pullout design-on standard, +6 & +12 lengths only; subject to Gusher Engineering approval



Low Maintenance

- Long service life
- Top pullout design option
- Renewable shaft sleeve and bushings

Custom Design

- Choice of materials
- Choice of pump length
- Choice of bushing material

Applications

- Agriculture
- Fibrous Waste
- Sludge
- Shavings
- Swarf
- Paper Pulp
- Wastewater



A RUTHMAN COMPANY

www.Gusher.com


Info@Gusher.com

859.824.5001


Performance Curve

1750 RPM

Recommended Operating Range

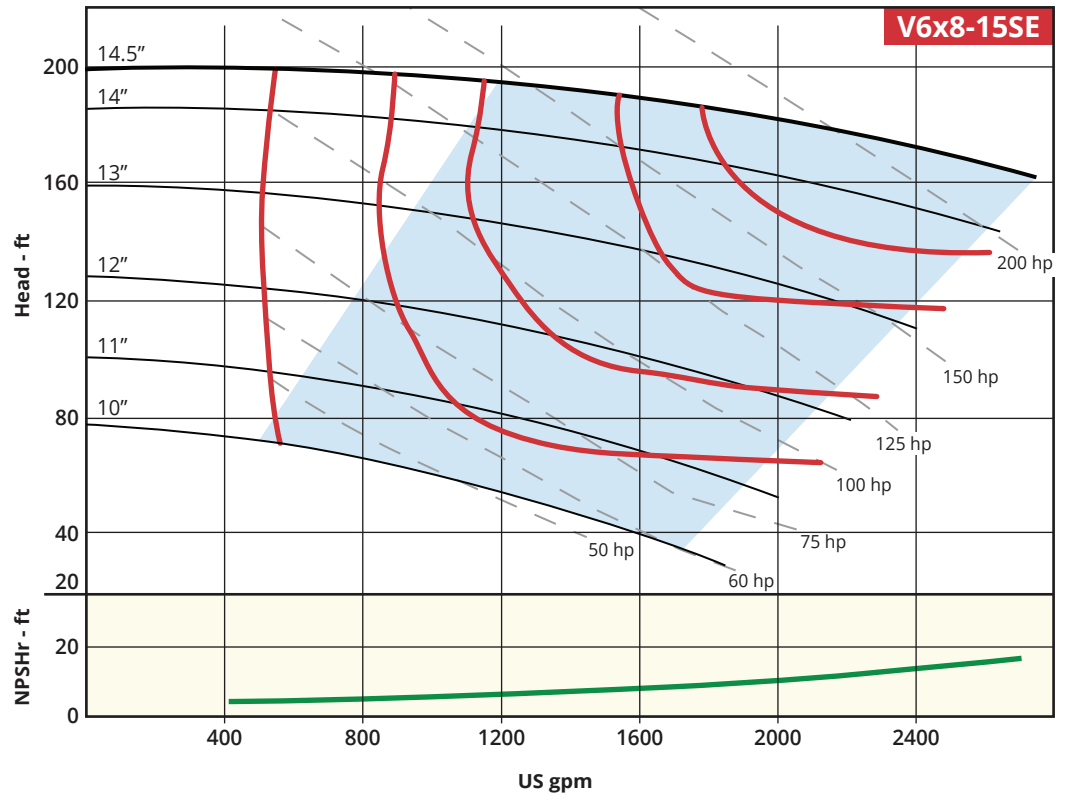

Dimensions*

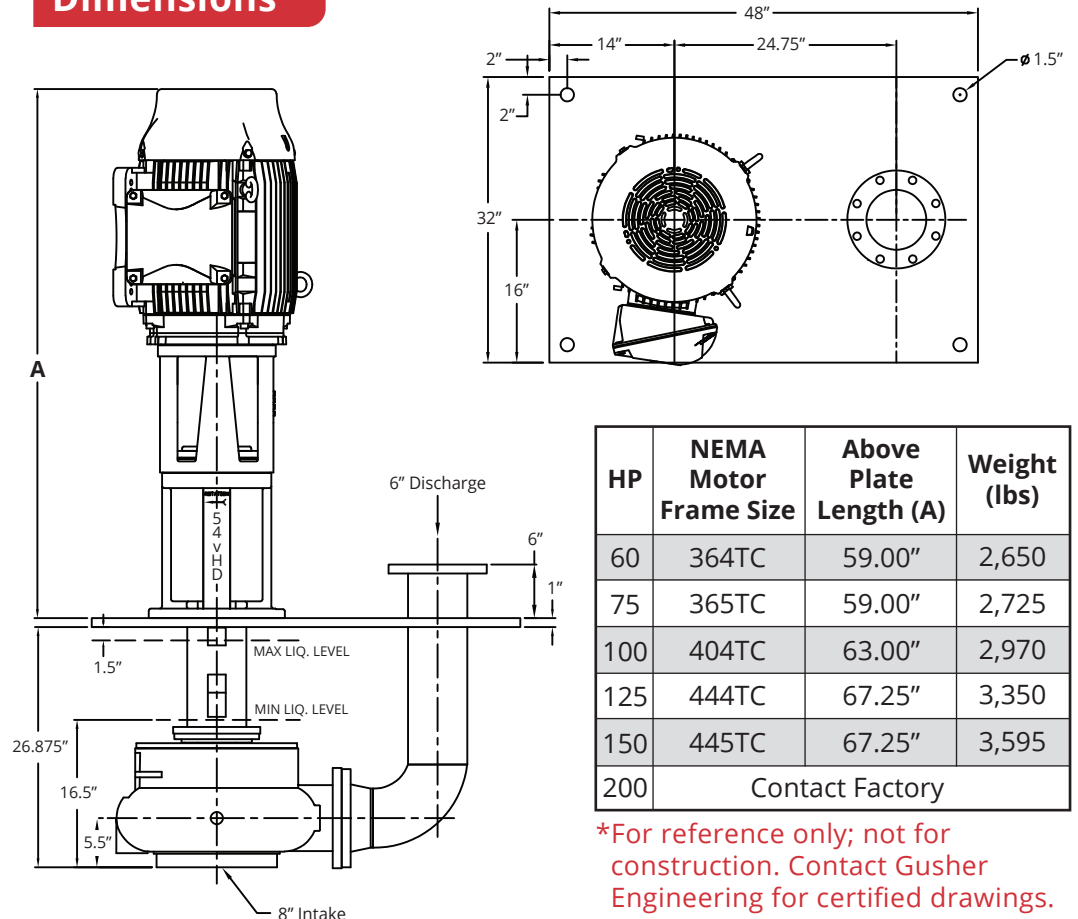

HP	NEMA Motor Frame Size	Above Plate Length (A)	Weight (lbs)
60	364TC	59.00"	2,650
75	365TC	59.00"	2,725
100	404TC	63.00"	2,970
125	444TC	67.25"	3,350
150	445TC	67.25"	3,595
200	Contact Factory		

*For reference only; not for construction. Contact Gusher Engineering for certified drawings.